


0.50mm

(0.02'') PITCH CONNECTOR

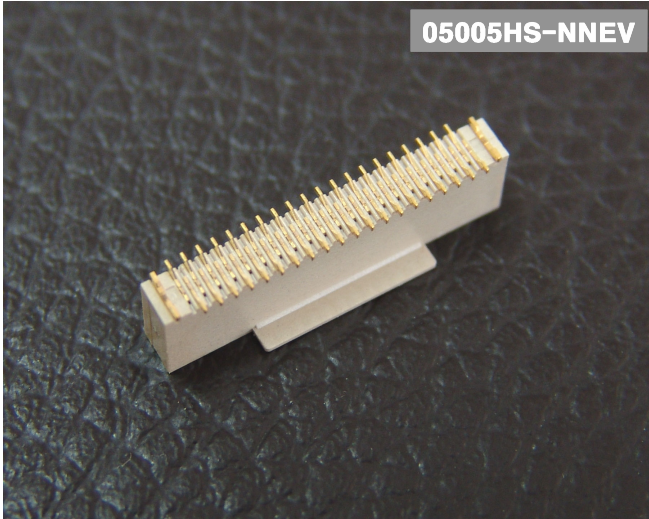

05005HS-NNEV

Material

I/NO	DESCRIPTION	MATERIAL
1	HOUSING	LCP(NC), UL94V-0
2	TERMINAL	Phosphor Bronze, Au(0.03um MIN)
3	HOOK	Phosphor Bronze, Au(0.03um MIN)

**FPC/FFC
Connectors**

Housing

Emboss
Type

SMT
Type

NonZIF
Type

Vertical
Type

Available Pin

PARTS NO.	A	B	C
05005HS-40EV	23.3	20.5	19.5

Specification

ITEM	SPEC
Voltage Rating	AC/DC 50V
Current Rating	AC/DC 0.5A
Operating Temperature	-25°C ~ +85°C
Contact Resistance	30mΩ MAX
Withstanding Voltage	AC250V/1min
Insulation Resistance	100MΩ MIN
Applicable Wire	-
Applicable P.C.B	0.8 ~ 1.6mm
Applicable FPC/FFC	0.30±0.02mm
Solder Height	0.15mm
Crimp Tensile Strength	-
UL FILE NO	-

