


# 1.00mm

## (0.039") PITCH CONNECTOR

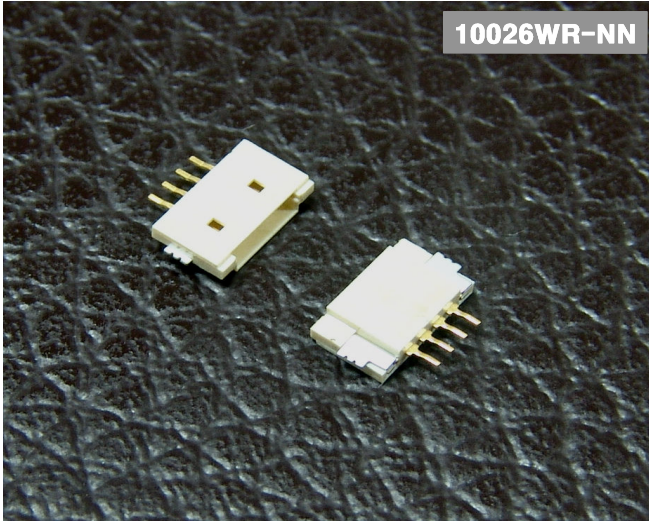

**10026WR-NN**

### Material

I/NO	DESCRIPTION	MATERIAL
1	WAFER	LCP, UL94V-0
2	TERMINAL	Phosphor Bronze, Au-plated
3	HOOK	Phosphor Bronze, Tin-plated

**Wire to Board  
Connectors**

**Wafer**

**Straight**

**SMT  
Type**

### Available Pin

PARTS NO.	A	B	C	D
10026WR-04	6.8	4.25	3.0	4.6
10026WR-06	8.8	6.25	5.0	6.6

### Specification

ITEM	SPEC
Voltage Rating	AC/DC 50V
Current Rating	AC/DC 0.5A
Operating Temperature	-25°C ~ +85°C
Contact Resistance	30mΩ MAX
Withstanding Voltage	AC500V/1min
Insulation Resistance	100MΩ MIN
Applicable Wire	-
Applicable P.C.B	0.8 ~ 1.6mm
Applicable FPC/FFC	-
Solder Height	0.15mm
Crimp Tensile Strength	-
UL FILE NO	-

