

# 2.00mm

(0.079'') PITCH CONNECTOR




## Wire to Board Connectors

Wafer

Emboss Type

SMT Type

Right Angle

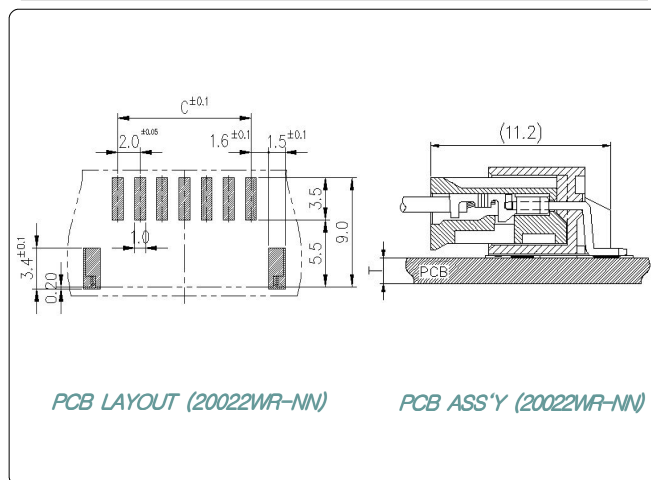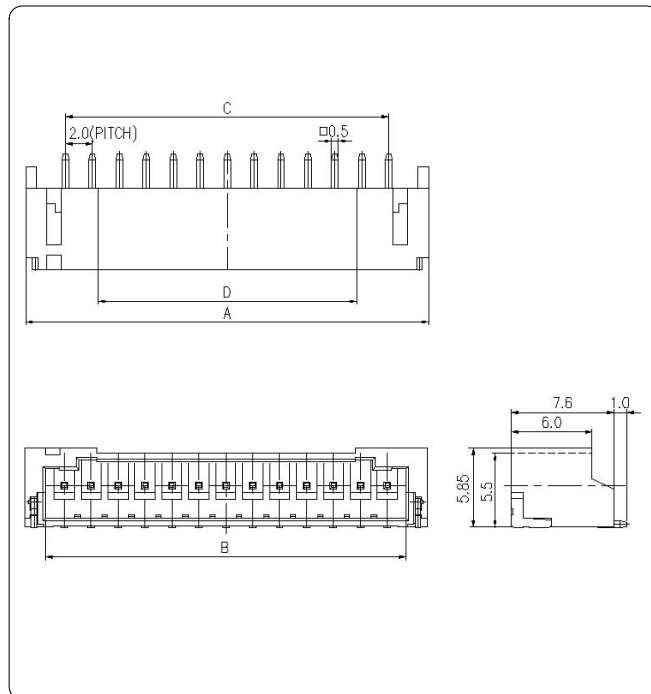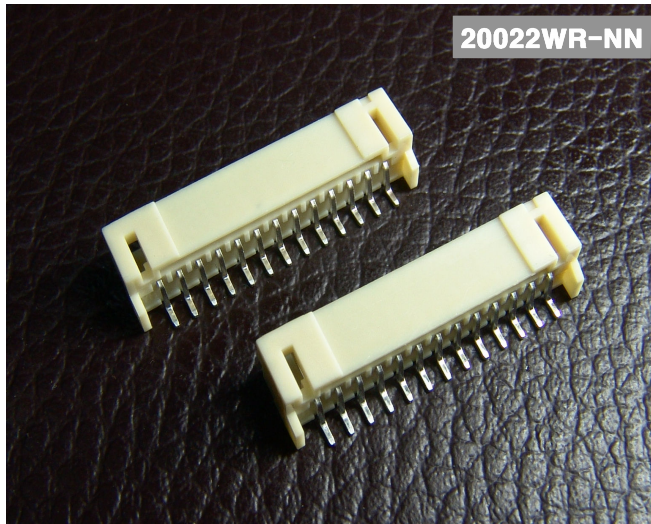

### Material

I/NO	DESCRIPTION	MATERIAL
1	WAFER	PA6T, UL94V-0
2	PIN	Brass, Tin-plated
3	HOOK	Brass, Tin-plated

### Available Pin

PARTS NO.	A	B	C	D
2002WR-02	8.0	4.75	2.0	-
2002WR-03	10.0	6.75	4.0	-
2002WR-04	12.0	8.75	6.0	-
2002WR-05	14.0	10.75	8.0	-
2002WR-06	16.0	12.75	10.0	5.2
2002WR-07	18.0	14.75	12.0	7.2
2002WR-08	20.0	16.75	14.0	9.2
2002WR-09	22.0	18.75	16.0	11.2
2002WR-10	24.0	20.75	18.0	13.2
2002WR-11	26.0	22.75	20.0	15.2
2002WR-12	28.0	24.75	22.0	17.2
2002WR-13	30.0	26.75	24.0	19.2
2002WR-14	32.0	28.75	26.0	21.2
2002WR-15	34.0	30.75	28.0	23.2

### Specification

ITEM	SPEC
Voltage Rating	AC/DC 125V
Current Rating	AC/DC 2A
Operating Temperature	-25°C~+85°C
Contact Resistance	30mΩ MAX
Withstanding Voltage	AC1000V/1min
Insulation Resistance	1000MΩ MIN
Applicable Wire	-
Applicable P.C.B	0.8~1.6mm
Applicable FPC/FFC	-
Solder Height	0.15mm
Crimp Tensile Strength	-
UL FILE NO	-