


2.50mm

(0.098") PITCH CONNECTOR

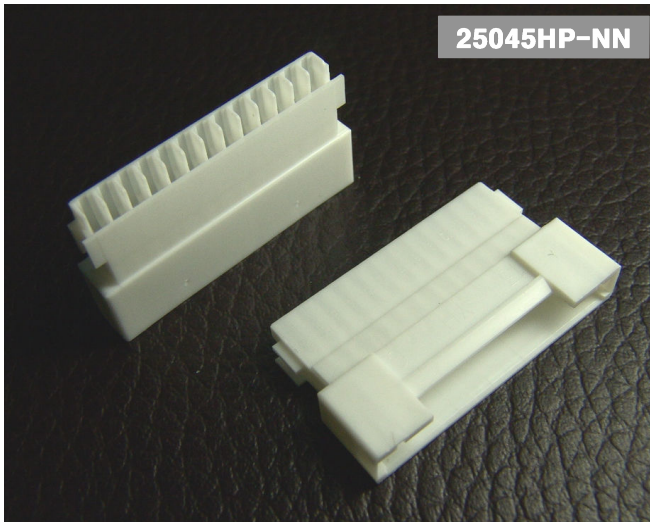

Material


I/NO	DESCRIPTION	MATERIAL
1	PLUG	NYLON 66, UL94V-0

Wire to Wire Connectors

Plug

Available Pin

PARTS NO.	A	B	C
25045HP-02	9.2	8.0	2.5
25045HP-03	11.7	10.5	5.0
25045HP-04	14.2	13.0	7.5
25045HP-05	16.7	15.5	10.0
25045HP-06	19.2	18.0	12.5
25045HP-07	21.7	20.5	15.0
25045HP-08	24.2	23.0	17.5
25045HP-09	26.7	25.5	20.0
25045HP-10	29.2	28.0	22.5
25045HP-11	31.7	30.5	25.0
25045HP-12	34.2	33.0	27.5
25045HP-13	36.7	35.5	30.0
25045HP-14	39.2	38.0	32.5
25045HP-15	41.7	40.5	35.0

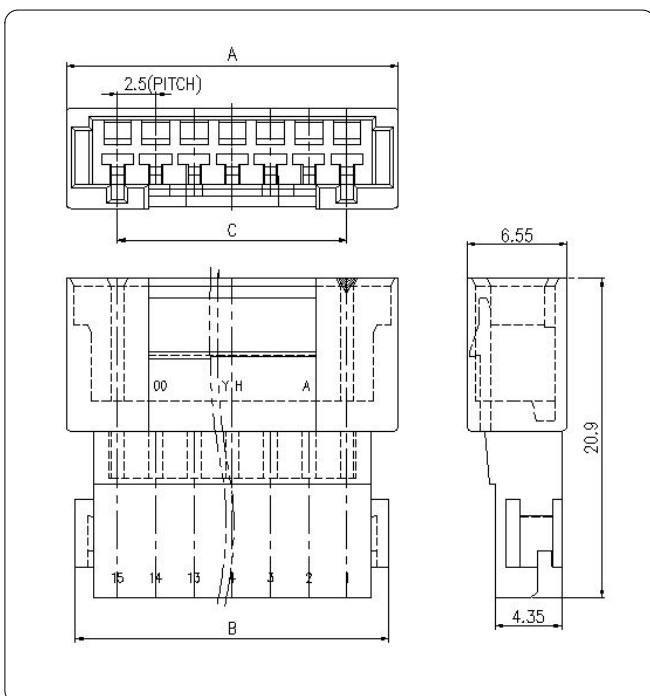

Specification

ITEM	SPEC
Voltage Rating	AC/DC 250V
Current Rating	AC/DC 2A
Operating Temperature	-25°C ~ +85°C
Contact Resistance	30mΩ MAX
Withstanding Voltage	AC1000V/1min
Insulation Resistance	1000MΩ MIN
Applicable Wire	AWG#22~#28
Applicable P.C.B	1.2~1.6mm
Applicable FPC/FFC	-
Solder Height	-
Crimp Tensile Strength	-
UL FILE NO	-

◆ Applicable Housing : 25045HS-NN

◆ Applicable Terminal : 25045TP

