


# 2.50mm

## (0.098") PITCH CONNECTOR

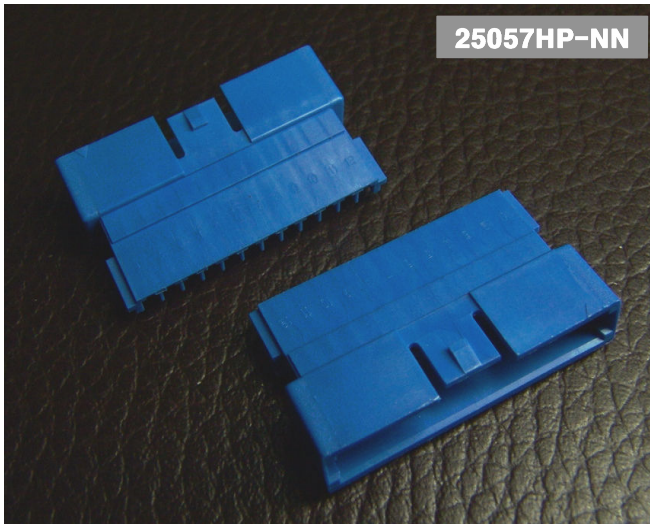

### Material


I/NO	DESCRIPTION	MATERIAL
1	PLUG	NYLON 66, UL94V-0

## Wire to Wire Connectors

### Plug

### Available Pin

PARTS NO.	A	B	C	D
25057HP-02	9.2	5.8	2.5	8.0
25057HP-03	11.7	8.3	5.0	10.5
25057HP-04	14.2	10.8	7.5	13.0
25057HP-05	16.7	13.3	10.0	15.5
25057HP-06	19.2	15.8	12.5	18.0
25057HP-07	21.7	18.3	15.0	20.5
25057HP-08	24.2	20.8	17.5	23.0
25057HP-09	26.7	23.3	20.0	25.5
25057HP-10	29.2	25.8	22.5	28.0
25057HP-11	31.7	28.3	25.0	30.5
25057HP-12	34.2	30.8	27.5	33.0
25057HP-13	36.7	33.3	30.0	35.5
25057HP-14	39.2	35.8	32.5	38.0
25057HP-15	41.7	38.3	35.0	40.5

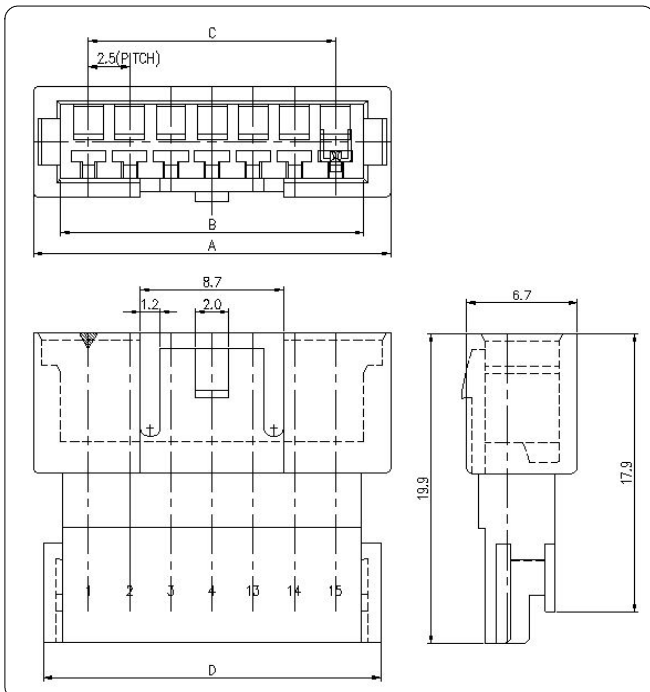

### Specification

ITEM	SPEC
Voltage Rating	AC/DC 250V
Current Rating	AC/DC 3A
Operating Temperature	-25°C~+85°C
Contact Resistance	30mΩ MAX
Withstanding Voltage	AC1000V/1min
Insulation Resistance	1000MΩ MIN
Applicable Wire	AWG#22~#28
Applicable P.C.B	1.2~1.6mm
Applicable FPC/FFC	-
Solder Height	-
Crimp Tensile Strength	-
UL FILE NO	-

◆ Applicable Housing : 25057HS-NN

◆ Applicable Terminal : 25045TP

