


# 2.50mm

## (0.098") PITCH CONNECTOR

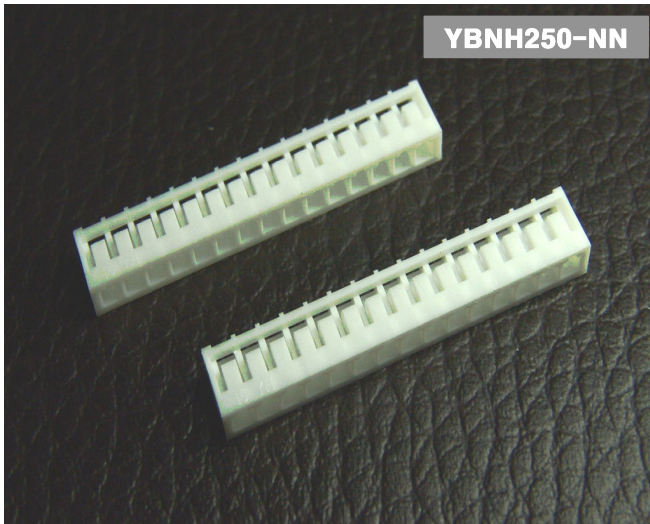

YBNH250-NN

### Material


I/NO	DESCRIPTION	MATERIAL
1	HOUSING	NYLON 66, UL94V-0

**Board - In  
Connectors**

**Housing**

### Available Pin

PARTS NO.	A	B	C
YBNH250-02	6.5	3.8	6.5
YBNH250-03	9.0	3.8	6.5
YBNH250-04	11.5	3.8	6.5
YBNH250-05	14.0	3.8	6.5
YBNH250-06	16.5	3.8	6.5
YBNH250-07	19.0	3.8	6.5
YBNH250-08	21.5	3.8	6.5
YBNH250-09	24.0	3.8	6.5
YBNH250-10	26.5	3.8	6.5
YBNH250-11	29.0	3.8	6.5
YBNH250-12	31.5	3.8	6.5
YBNH250-13	34.0	3.8	6.5
YBNH250-14	36.5	3.8	6.5
YBNH250-15	39.0	3.8	6.5

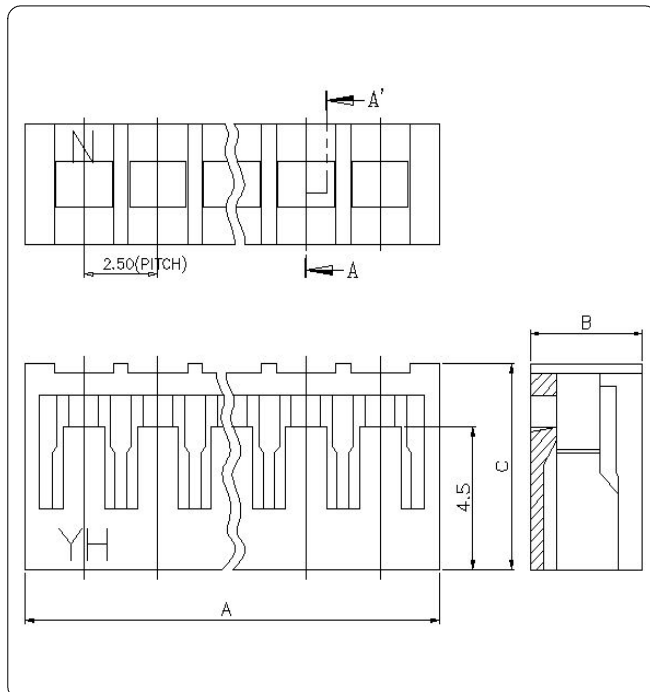

### Specification

ITEM	SPEC
Voltage Rating	AC/DC 250V
Current Rating	AC/DC 3A
Operating Temperature	-25°C~+85°C
Contact Resistance	-
Withstanding Voltage	AC1000V/1min
Insulation Resistance	1000MΩ MIN
Applicable Wire	AWG #22~#28
Applicable P.C.B	1.2~1.6mm
Applicable FPC/FFC	-
Solder Height	-
Crimp Tensile Strength	-
UL FILE NO	E108706

◆ Applicable Terminal : YBNT250

